

## DTF PRINTER

### DTF 白墨烫画机

KJ-602DTF+604DTF



## Printer Advantages

### 产品优势



White ink automatic mixing and circulation system, without blockage

白墨自动搅拌循环系统, 不堵头



Elevating the ink stack, automatic cleaning, and protecting the nozzle

升降式墨栈, 自动清洗, 保护喷头



Dual rail lifting head carriage, anti-collision.

双轨升降小车架, 小车防撞以及物理喷头双重保护



EPSON original I3200 A1 printhead, high precision, fast speed


采用EPSON原装I3200 A1水性喷头, 精度高、速度快

## Product Applications


### 产品应用



Hoodie  
卫衣

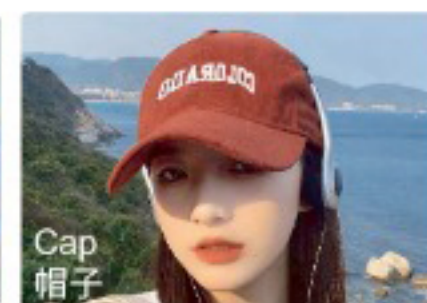

Cap  
帽子

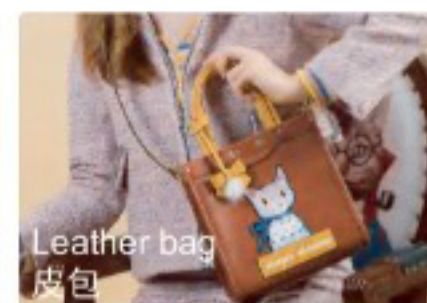


Leather bag  
皮包



Jean  
牛仔



Mouse pad  
鼠标垫

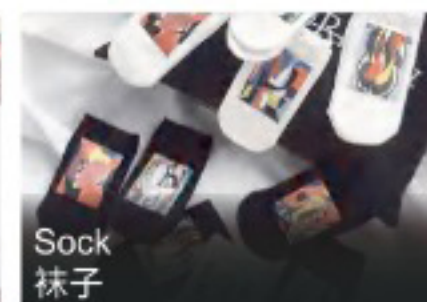

Sock  
袜子



T shirt  
t恤



Umbrella  
雨伞

## Technical Specifications

### 技术参数

|                                  |                                                                                           |                                                                                          |
|----------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Product / 产品                     | DTF PRINTER / 白墨烫画机                                                                       |                                                                                          |
| Model / 型号                       | KJ-602                                                                                    | KJ-604                                                                                   |
| Printhead / 喷头                   | 2 * EPSON I3200-A1                                                                        | 4 * EPSON I3200-A1                                                                       |
| Printing Speed / 打印速度            | Output (sqm/h) 输出(平方/小时)                                                                  |                                                                                          |
| 4 Pass                           | 15sqm/h                                                                                   | 30sqm/h                                                                                  |
| 6 Pass                           | 10sqm/h                                                                                   | 20sqm/h                                                                                  |
| 8 Pass                           | 8sqm/h                                                                                    | 16sqm/h                                                                                  |
| Max Media Width<br>进料最大宽幅        | 730mm                                                                                     |                                                                                          |
| Max Print Width<br>打印最大宽幅        | 680mm                                                                                     |                                                                                          |
| Ink Type / 墨水类型                  | Waterbased Pigment Ink 水性颜料墨水                                                             |                                                                                          |
| Color / 墨水颜色                     | C, M, Y, K, W                                                                             | C, M, Y, K, W (RGBO and fluorescence colors available 可选专色和荧光色方案)                        |
| Ink Supply / 供墨系统                | Continuous Ink Supply System 自动供墨系统                                                       |                                                                                          |
| White Ink Cycle / 白墨循环           | Equipped 配备                                                                               |                                                                                          |
| Media Type / 介质类型                | PET film PET 膜                                                                            |                                                                                          |
| Heating System / 加热系统            | Intelligent Embedded Heating System 嵌入式智能加热系统<br>Powder Melt Machine 抖粉加热系统               |                                                                                          |
| Feed & Take up System<br>收放布系统   | Equipped 配备                                                                               |                                                                                          |
| Capping&Moisturizing<br>喷头自动清洗系统 | Auto Capping System&Moisturizing System<br>自动清洗具有防堵闪喷功能及保湿功能                              |                                                                                          |
| RIP Software / RIP 软件            | Maintop, Photoprint, CADlink, Caldera (Optional 可选)                                       |                                                                                          |
| Input Power / 输入电源               | AC110V/220V, 50Hz/60Hz 350W-4000W                                                         |                                                                                          |
| Working Environment<br>使用环境      | Temperature 温度: 18-32°C Humidity 湿度: 46-65%                                               |                                                                                          |
| Machine Size / 机器尺寸              | Printer打印: 1750*750*1450mm; 135KG<br>Shaker抖粉: 1885*870*930mm; 229KG                      | Printer打印: 1850*795*1600mm; 172KG<br>Shaker抖粉: 2250*1000*1000mm; 270KG                   |
| Packing Size / 包装尺寸              | Printer打印: 1950*820*700mm; 182KG; 1.160CBM<br>Shaker抖粉: 1480*1030*1220mm; 274KG; 2.320CBM | Printer打印: 2060*890*790mm; 217KG; 1.448CBM<br>Shaker抖粉: 2290*980*1210mm; 392KG; 2.830CBM |