

DTF PRINTER

DTF 白墨烫画机

KJ-604PRO



Printer Advantages

产品优势




One-piece cabinet design replacing traditional component assembly, making the machine more stable
一体式箱体设计取代传统组件组装, 使机器更稳定



The ink level display for a direct view of the ink quantity
添加了墨水量显示, 直接查看墨水量






Ink depletion alarm and a three-color light for better monitoring operation
具有墨水耗尽警报和三色灯, 可更好地监控操作

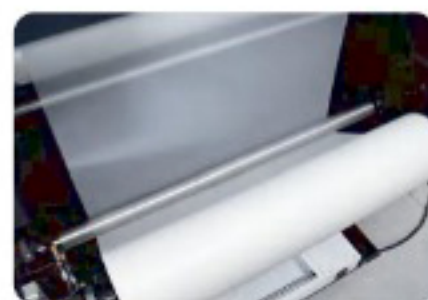

Updated material collection and release device, and a swing rod to increase traction force in material feeding
全新收料和放料设置, 和一个增加进料牵引力的摆动杆

Product Applications

产品应用

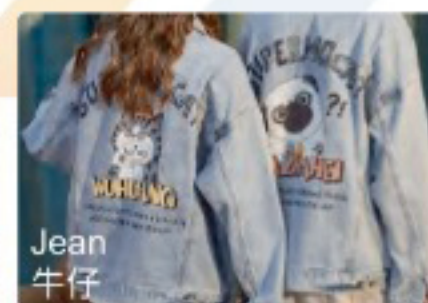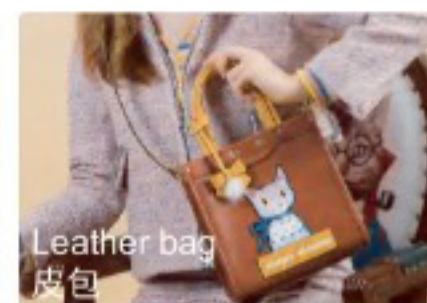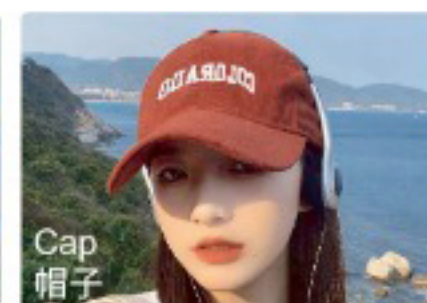

Technical Specifications

技术参数

Product / 产品	DTF PRINTER / 白墨烫画机
Model / 型号	KJ-604PRO
Printhead / 喷头	4 * EPSON I3200-A1
Printing Speed / 打印速度	Output (sqm/h) 输出(平方/小时)
4 Pass	30sqm/h
6 Pass	20sqm/h
8 Pass	16sqm/h
Max Media Width 进料最大宽幅	730mm
Max Print Width 打印最大宽幅	680mm
Ink Type / 墨水类型	Waterbased Pigment Ink 水性颜料墨水
Color / 墨水颜色	C, M, Y, K, W (RGOB and fluorescence colors available 可选专色和荧光色方案)
Ink Supply / 供墨系统	Continuous Ink Supply System 自动供墨系统
White Ink Cycle / 白墨循环	Equipped 配备
Media Type / 介质类型	PET film PET 膜
Heating System / 加热系统	Intelligent Embedded Heating System 嵌入式智能加热系统 Powder Melt Machine 抖粉加热系统
Feed & Take up System 收放布系统	Equipped 配备
Capping&Moisturizing 喷头自动清洗系统	Auto Capping System&Moisturizing System 自动清洗具有防堵闪喷功能及保湿功能
RIP Software /RIP 软件	Maintop, Photoprint, CADlink, Caldera(Optional 可选)
Input Power / 输入电源	AC110V/220V, 50Hz/60Hz 350W-4000W
Working Environment 使用环境	Temperature 温度: 18-32°C Humidity 湿度: 46-65%
Machine Size / 机器尺寸	Printer打印: 1890*870*1330mm; 230KG Shaker抖粉: 2250*1000*1000mm; 270KG
Packing Size / 包装尺寸	Printer打印: 2124*1010*1620mm; 280KG; Shaker抖粉: 2290*980*1210mm; 392KG; 2.830CBM